
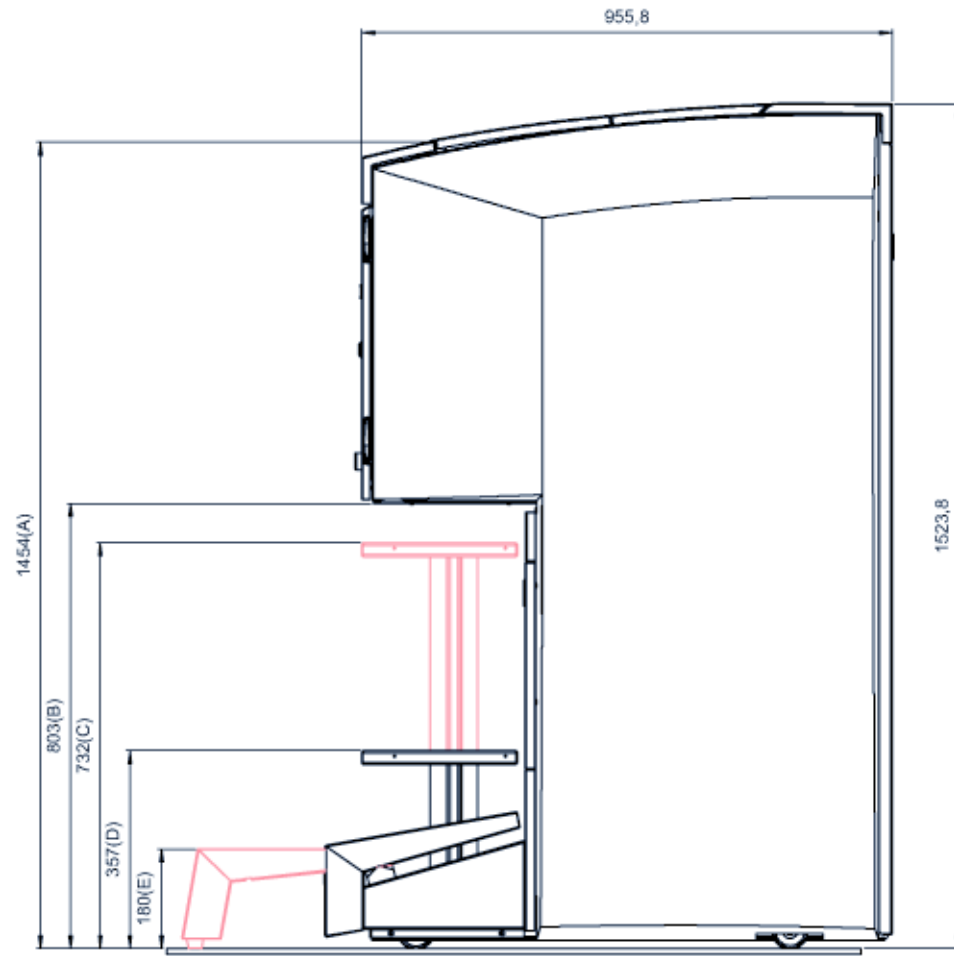


Info block to be used for End of service
PCP <input type="checkbox"/> DXP <input type="checkbox"/> CWG <input type="checkbox"/>
Remove sharp edges
Tool:
V - Die:
Colour:
End Product
Semi Manufactured

Rev.	Description	By	Date
------	-------------	----	------

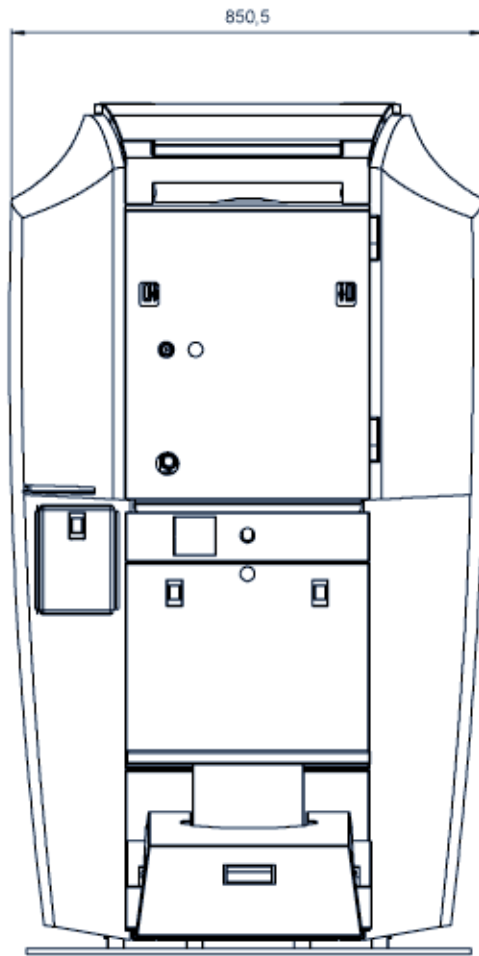

- A = Can load height.
- B = Bottom switch plate.
- C = Maximum height electric cantable.
- D = Minimum height electric cantable.
- E = Step height.

ALL DIMS ACC TO IEC 60730-1 UNLESS OTHERWISE SPECIFIED

50-60 Hz	120-240 V AC	SHORTCIRCUIT	50-120 A 42°
50-60 Hz	400-1000 V AC		10-40 A 42°
50-60 Hz	1000-2000 V AC		10-40 A 42°
		10-50 A 30°	1400 ± 5°

FAST & FLUID MANAGEMENT THE NETHERLANDS
 A DIV OF BEEK CORPORATION
 P.O. Box 2011 2178 AG Oude Rijnlaan
 1420 BR Oude Rijnlaan 211 2171 AZ Grootbroek
 Telephone +31 (0)2525 24188
 Fax +31(0)252 340 933 www.fast-fluid.com

CONFIDENTIAL PROPRIETARY MATERIAL <small>Reproduction, modification, distribution and/or other copies of these drawings are strictly prohibited without the written approval of FAST & FLUID MANAGEMENT</small>		TECHNICAL DRAWING NON-ISO 1101 NON-ISO 406 NON 3534	Projection
Size: A2	Unit: mm	Date: 7/28/2004	
Project:	Drawn:	Assembly partnr:	
Dim:	Material:		
Name:	Partnr:		